

6

5

4

3


2

1


REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	ECO-15582	03/06/2026	HBAKKE	DGUST


P1



PIN 1

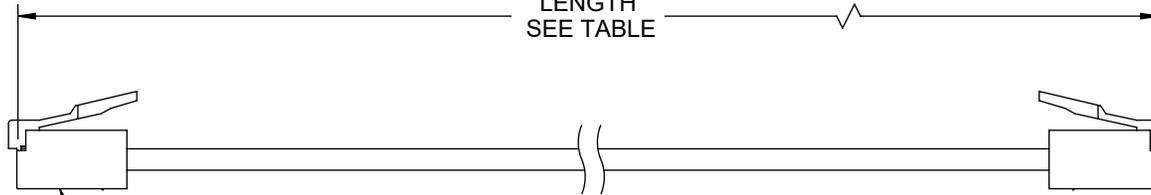LENGTH
SEE TABLE

P2



PIN 1

2X RJ12 PLUG (6X6)

ITEM NUMBER	LENGTH	
	FEET	METERS
15-302-003R	3.0	0.91
15-302-007R	7.0	2.13
15-302-014R	14.0	4.27
15-302-025R	25.0	7.62
15-302-050R	50.0	15.24
15-302-100R	100.0	30.48
15-302-150R	150.0	45.72
15-302-200R	200.0	60.96

WIRING MAP

P1	COLOR	P2
1	WHITE	6
2	BLACK	5
3	RED	4
4	GREEN	3
5	YELLOW	2
6	BLUE	1

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 CABLE JACKET: PVC, GRAY

FINISH:

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:

6 CONDUCTOR FLAT MODULAR CORD, SILVER SATIN PVC OUTER JACKET
 U.L. STYLE 20251, 26 AWG STRANDED

MISCELLANEOUS:

PLUG CONFORMS TO TIA-1096
 OPERATING TEMPERATURE RANGE: -20°C TO +60°C
 CORDS TO BE TESTED FOR CONTINUITY.
 CORDS TO BE INDIVIDUALLY PACKAGED IN A POLYBAG.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
 LEADING DIMENSIONS ARE INCHES
 DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5]	FRACTIONS
.XX = ±.02 [0.5]	± 1/32
.XXX = ±.005 [0.13]	ANGLES ± 1°


CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
 AND SUBJECT TO CHANGE WITHOUT NOTICE.
 UN-DIMENSIONED NON-CRITICAL FEATURES
 MAY VARY IN SIZE AND LOCATION
 COLORS MAY VARY

Show Me™
CABLES

an INFINIT® brand

Website: www.ShowMeCables.com
 Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
 TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION

RJ12 LINE CORD - 6 CONDUCTOR - REVERSE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	HBAKKE	15-302-XXXX	A

6

5

4

3

2

1