

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-15142	01/29/2026	TDUFRENE	DGUST

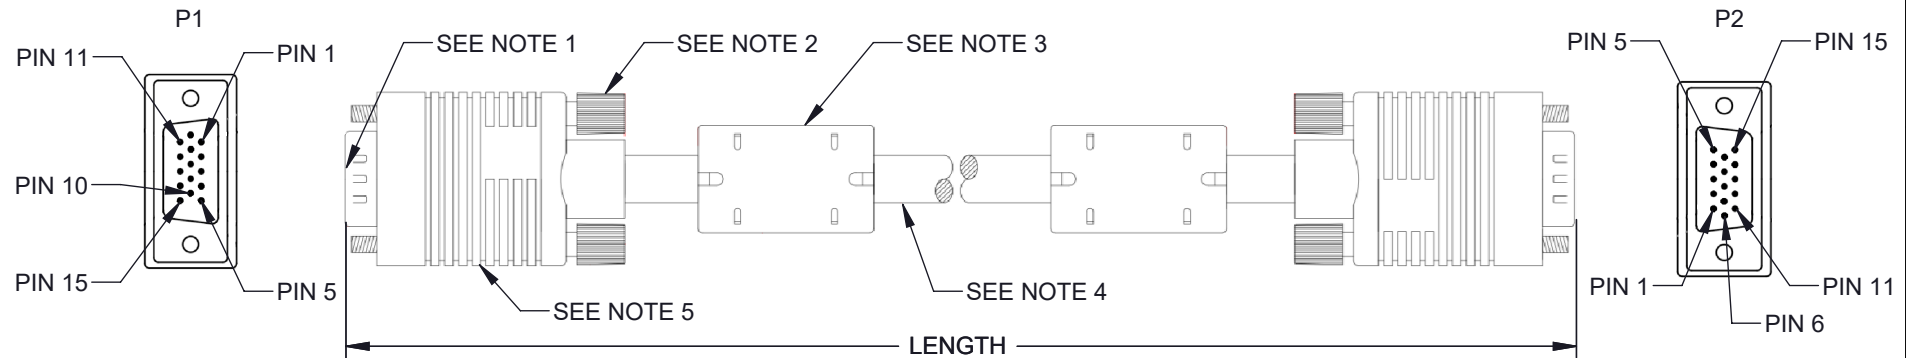

WIRING MAP

P1		P2	
1	—	1	RED CONDUCTOR
6	—	6	RED SHIELD
2	—	2	GREEN CONDUCTOR
7	—	7	GREEN SHIELD
3	—	3	BLUE CONDUCTOR
8	—	8	BLUE SHIELD
4	—	4	BROWN
14	—	14	BROWN/WHITE
5	—	5	RED
12	—	12	RED/WHITE
9	—	9	YELLOW
10	—	10	ORANGE
13	—	13	ORANGE/WHITE
11	—	11	BLACK
15	—	15	BLACK/WHITE
SHIELD	—	SHIELD	SHIELD

1. HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
2. MOLDED THUMBSCREW #4-40, LENGTH 49mm, BLACK
3. FERRITE CORE 17.5*10.5*28.5mm
4. UL2919{[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(28AWG*4.5P)}, AL+D 28#+AMA, BRAID(47%), OD:8.8mm, JACKET BLACK GROOVE
5. MOLDED PVC BLACK
MOLDED PE COLOR TRANSPARENT
ALUMINUM FOIL 33*65mm
BLACK HEAT SHRINK TUBE Ø1.5*15mm
BLACK HEAT SHRINK TUBE Ø3.0*10mm
BLACK PVC TUBE Ø3.0*22mm
6. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
7. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
PREMIUM VGA MONITOR REPLACEMENT CABLE - MALE/MALE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	TDUFRENE	43-313-XXX	B

6

5

4

3

2

1