

6

5

4

3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/07/2025	DMAY	DREBECK

F

E

D

C

B

A

F

E

D

C

B

A

LENGTH (L1)

LENGTH (L2)

SF-31 N5-15P MALE

SJT 18AWGx3C 105°C
BLACK PVC 300V VW-1

F-082

SF-82S IEC C13 FEMALE

N WHITE

E GREEN

L BLACK

E GREEN

L BLACK

N WHITE

FILE NO. REPLACEABLE
WX(YFC-U)
PH(YFC-F)

INSULATION: OD:2.8±0.2mm

CONDUCTOR

JACKET: OD:7.8±0.3mm

WHITE

GREEN

BLACK

FILLER

A-A

FILE NO. REPLACEABLE
WX(YFC-U)
PH(YFC-F)YFC-U
SF-82S
E94923
10A 125V~B
3:1

NOTES:

- VOLTAGE RATING:
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 SEC
CONDUCTOR RESISTANCE $\leq 22.84\Omega/1000m$
VOLTAGE RATING AC 300V
- CABLE MARKING:
WX(NO.441): (UL) E135710-F5 SJT 3x18AWG 105°C 300V VW-1
c(UL)SJT 3x0.824mm² (18AWG) 105°C 300V FT2
PH(NO.854): (UL) E135710-F7 SJT 3x18AWG 105°C 300V VW-1
c(UL)SJT 3x0.824mm² (18AWG) 105°C 300V FT2
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINITE® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 2

DESCRIPTION
NEMA 5-15 TO C13 SPLITTER POWER CORD-10 AMP

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	44-223-YYY	A

6

5

4

3

2

1

F

F

E

E

D

D

C

C


B

B

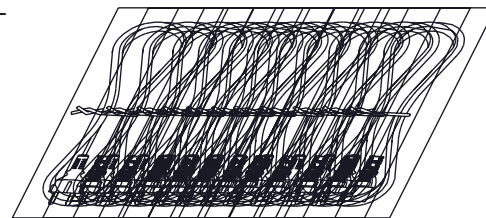

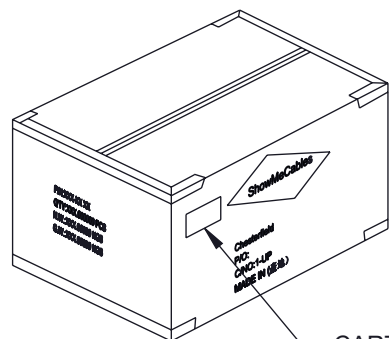
A

A

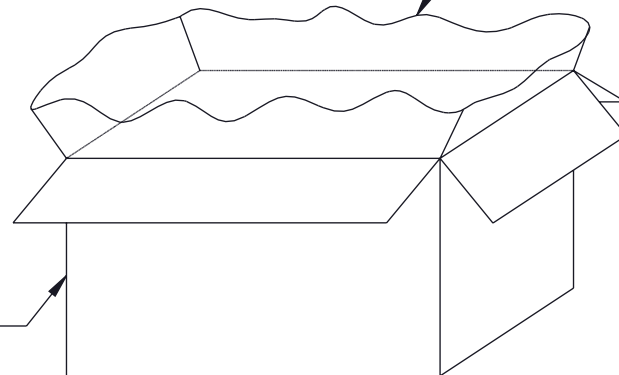
MINI TIE



PE BAG

CUSTOMER
BARCODE LABELBIG PE BAG
56x38x50x0.003cm

CARTON LABEL

CARTON
OUTER BOX

CUSTOMER ITEM NO.	LENGTH(mm)	QTY	CARTON SIZE
44-223-010	3048 ±30	60	50x32x28cm
44-223-015	4572 ±30	50	50x32x28cm

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES

an INFINITE brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

2 OF 2

DESCRIPTION

NEMA 5-15 TO C13 SPLITTER POWER CORD-10 AMP

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	44-223-YYY	A

6

5

4

3

2

1