

6

5

4


3

2



1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/10/2024	DMAY	DGUTTADAURO



P1

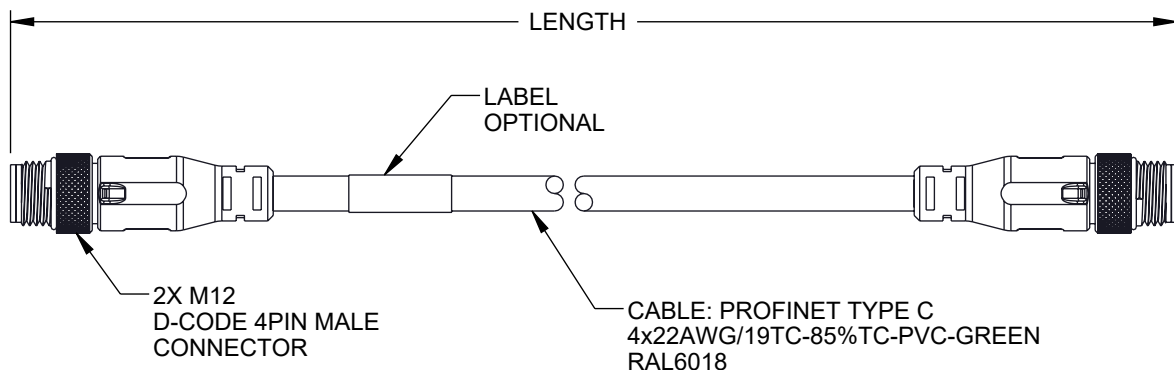

P2

PART NUMBER	LENGTH	
	FEET	METERS
PNCV-M12-1M	3.28	1 ±.03
PNCV-M12-3M	10	3 ±.05

P1 WIRING DIAGRAM P2

Pin1	YELLOW	Pin1
Pin3	ORANGE	Pin3
Pin2	WHITE	Pin2
Pin4	BLUE	Pin4
SHIELD		SHIELD

NOTES:

- ELECTRICAL TEST:
 - 100% OPEN SHORT MISWIRE TEST.
 - INSULATION RESISTANCE: 10M OHM MIN, 300V/DC.
 - CONDUCTOR RESISTANCE: 3 OHM MAX.
- DATA TRANSFER RATE: PASS THE PROFINET TEST.
- ALL MATERIAL MUST BE RoHS 2.0.
- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 2

DESCRIPTION

SHOWMECABLES 4 POSITION D CODED M12, PROFINET TYPE
C CABLE, GREEN, 22 AWG, PVC, SHIELDED

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	PNCV-M12	A

6

5

4

3

2

1

6

5

4

3


2

1

F

F

CARTON LABEL SKETCH MAP

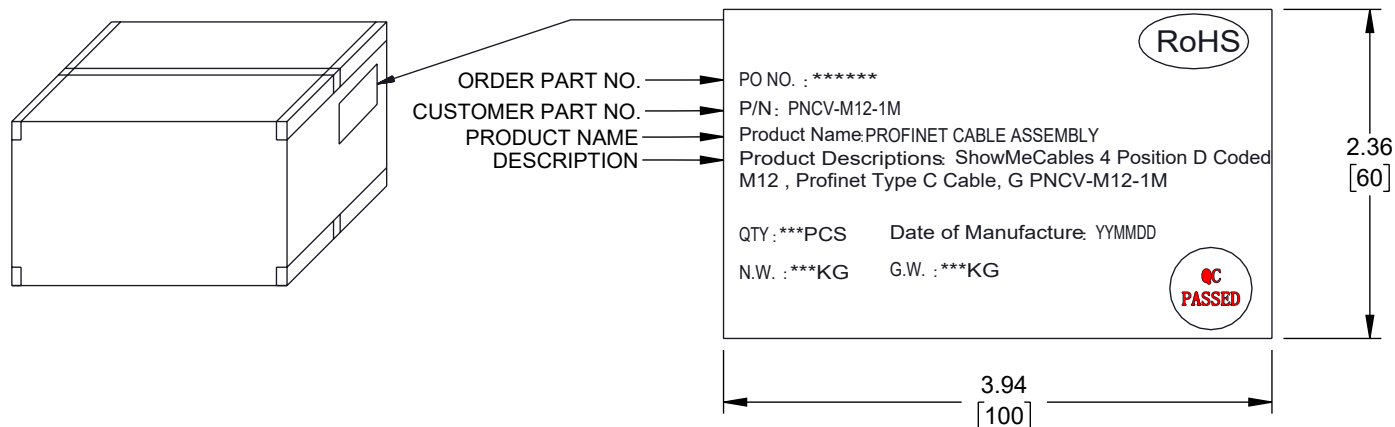


E

E

D

D

PACKAGING DIAGRAM

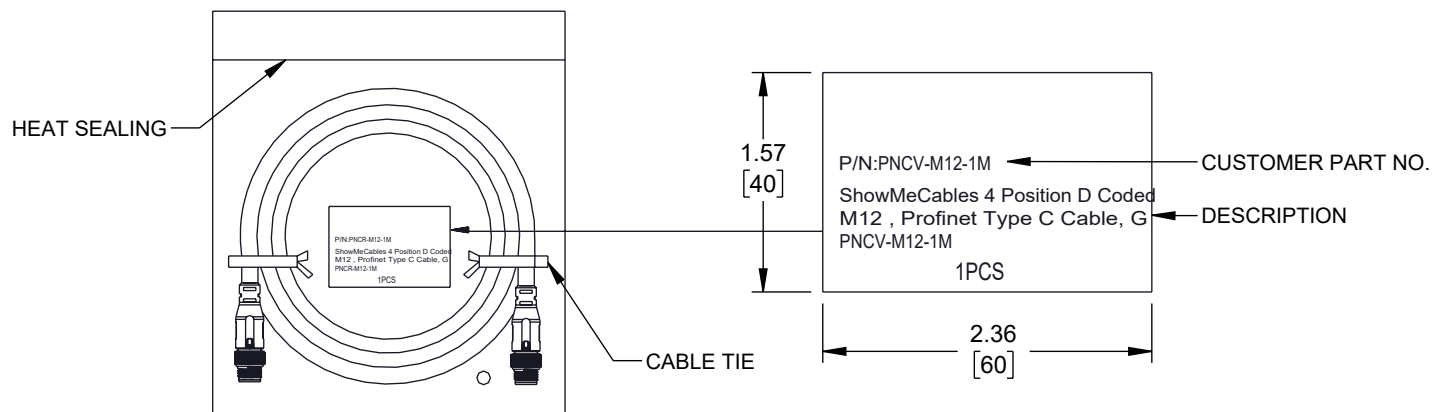

C

C

B

B

A

A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

Show Me CABLES an INFINITE® brand				
Website: www.ShowMeCables.com Phone: 1.888.519.9505		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5		
DESCRIPTION		SCALE	SHEET	
SHOWMECABLES 4 POSITION D CODED M12, PROFINET TYPE C CABLE, GREEN, 22 AWG, PVC, SHIELDED		NONE	2 OF 2	
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	PNCV-M12	A

6

5

4

3

2

1