

6

5


4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	07/18/2024	HBAKKE	GUTTADAURO

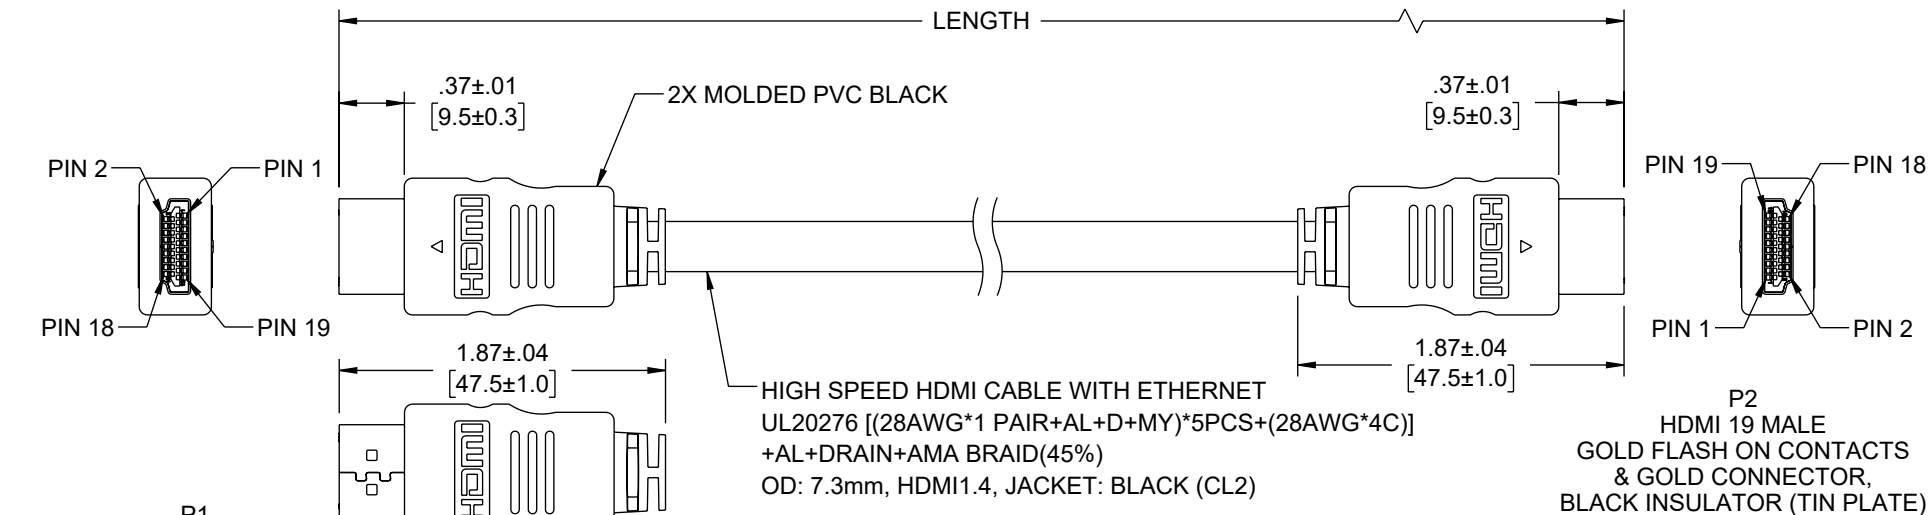

P1
HDMI 19 MALE
GOLD FLASH ON CONTACTS
& GOLD CONNECTOR,
BLACK INSULATOR (TIN PLATE)

P2
HDMI 19 MALE
GOLD FLASH ON CONTACTS
& GOLD CONNECTOR,
BLACK INSULATOR (TIN PLATE)

PIN ASSIGNMENT

P1	P2	P1	P2
1	RED	14	RED
3	WHITE	19	WHITE
2	PURPLE AL/MY	17	SILVER AL/MY
4	RED	13	RED
6	WHITE	15	ORANGE
5	GREEN AL/MY	16	WHITE
7	RED	18	YELLOW
9	WHITE	SHIELD	SHIELD
8	BLUE AL/MY	8	SHIELD
10	RED	10	RED
12	WHITE	12	WHITE
11	BROWN AL/MY	11	SHIELD

ITEM NUMBER	LENGTH [TOL.]	
	FEET [IN]	METERS [mm]
SHD-14CL2-MM-25F	25.0 [±1.57]	7.62 [±40]

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.
- DIMENSIONS FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

DESCRIPTION
HIGH SPEED HDMI CABLE WITH ETHERNET SUPPORTING
4K30Hz, 2K60Hz, IN-WALL CL2 FT4 RATED, MALE-PLUG TO
MALE-PLUG, BLACK, 25FT

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	HBAKKE	SHD-14CL2-MM-25F	A

6

5

4

3

2

1