

862 to 928 MHz Rubber Duck Antenna 3 dBi RP-SMA Male Tilt Swivel

SMANRBD1056



Features

- 862 MHz to 928 MHz
- 3 dBi Gain
- Reverse Polarity SMA Male connector
- Tilt/Swivel
- VSWR 2.5:1
- Linear polarization

Applications

- LPWAN
- ISM
- LoRaWAN
- Sigfox
- Weightless-P
- WiFi HaLow
- Fixed and Mobile Devices

Description

The SMANRBD1056 is a high-quality dual-band rubber duck antenna with 3 dBi nominal gain and has a frequency range of 862 MHz to 928 MHz. ShowMeCables's omnidirectional tilt/swivel rubber duck antenna is 5.34 inches tall and 0.79 inches wide.

The SMANRBD1056 rubber duck antenna from ShowMeCables features a Reverse Polarity SMA Male connector with an input VSWR (voltage standing wave ratio) of 2.5:1.

ShowMeCables's linearly polarized antenna can operate at temperatures ranging from -40 °C to 60 °C. This dual-band rubber duck antenna is offered with expert technical support, PDF datasheets, and CAD drawings with dimensions and specifications.

Configuration

Design	Rubber Duck
Band Type	Dual
Radiation Pattern	Omni Directional
Polarization	Linear
Connector Type	SMA Male Reverse Polarity
Number of Ports	1

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	862		928	MHz
Input VSWR			2.5:1	
Impedance		50		Ohms
Gain		3		dBi

Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Frequency	0.862 to 0.87	0.902 to 0.928				GHz

Mechanical Specifications

Whip Material	ABS
Size	
Length	5.34 in [135.64 mm]

862 to 928 MHz Rubber Duck Antenna 3 dBi RP-SMA Male Tilt Swivel



SMANRBD1056

Width	0.79 in [20.07 mm]
Height	0.79 in [20.07 mm]
Weight	0.2 lbs [90.72 g]

Connectors

Description	Connector 1	Connector 2	Connector 3
Body Material and Plating	Brass		

Environmental Specifications

Temperature	
Operating Range	-20 to +65 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Radiation Pattern

Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.


FPO Show Me Cables specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

FPO Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [862 to 928 MHz Rubber Duck Antenna 3 dBi RP-SMA Male Tilt Swivel SMANRBD1056](#)


FPO The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Show Me Cables reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Show Me Cables does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Show Me Cables does not assume liability arising out of the use of any part or document.

SMANRBD1056 CAD Drawing

862 to 928 MHz Rubber Duck Antenna 3 dBi RP-SMA Male Tilt Swivel

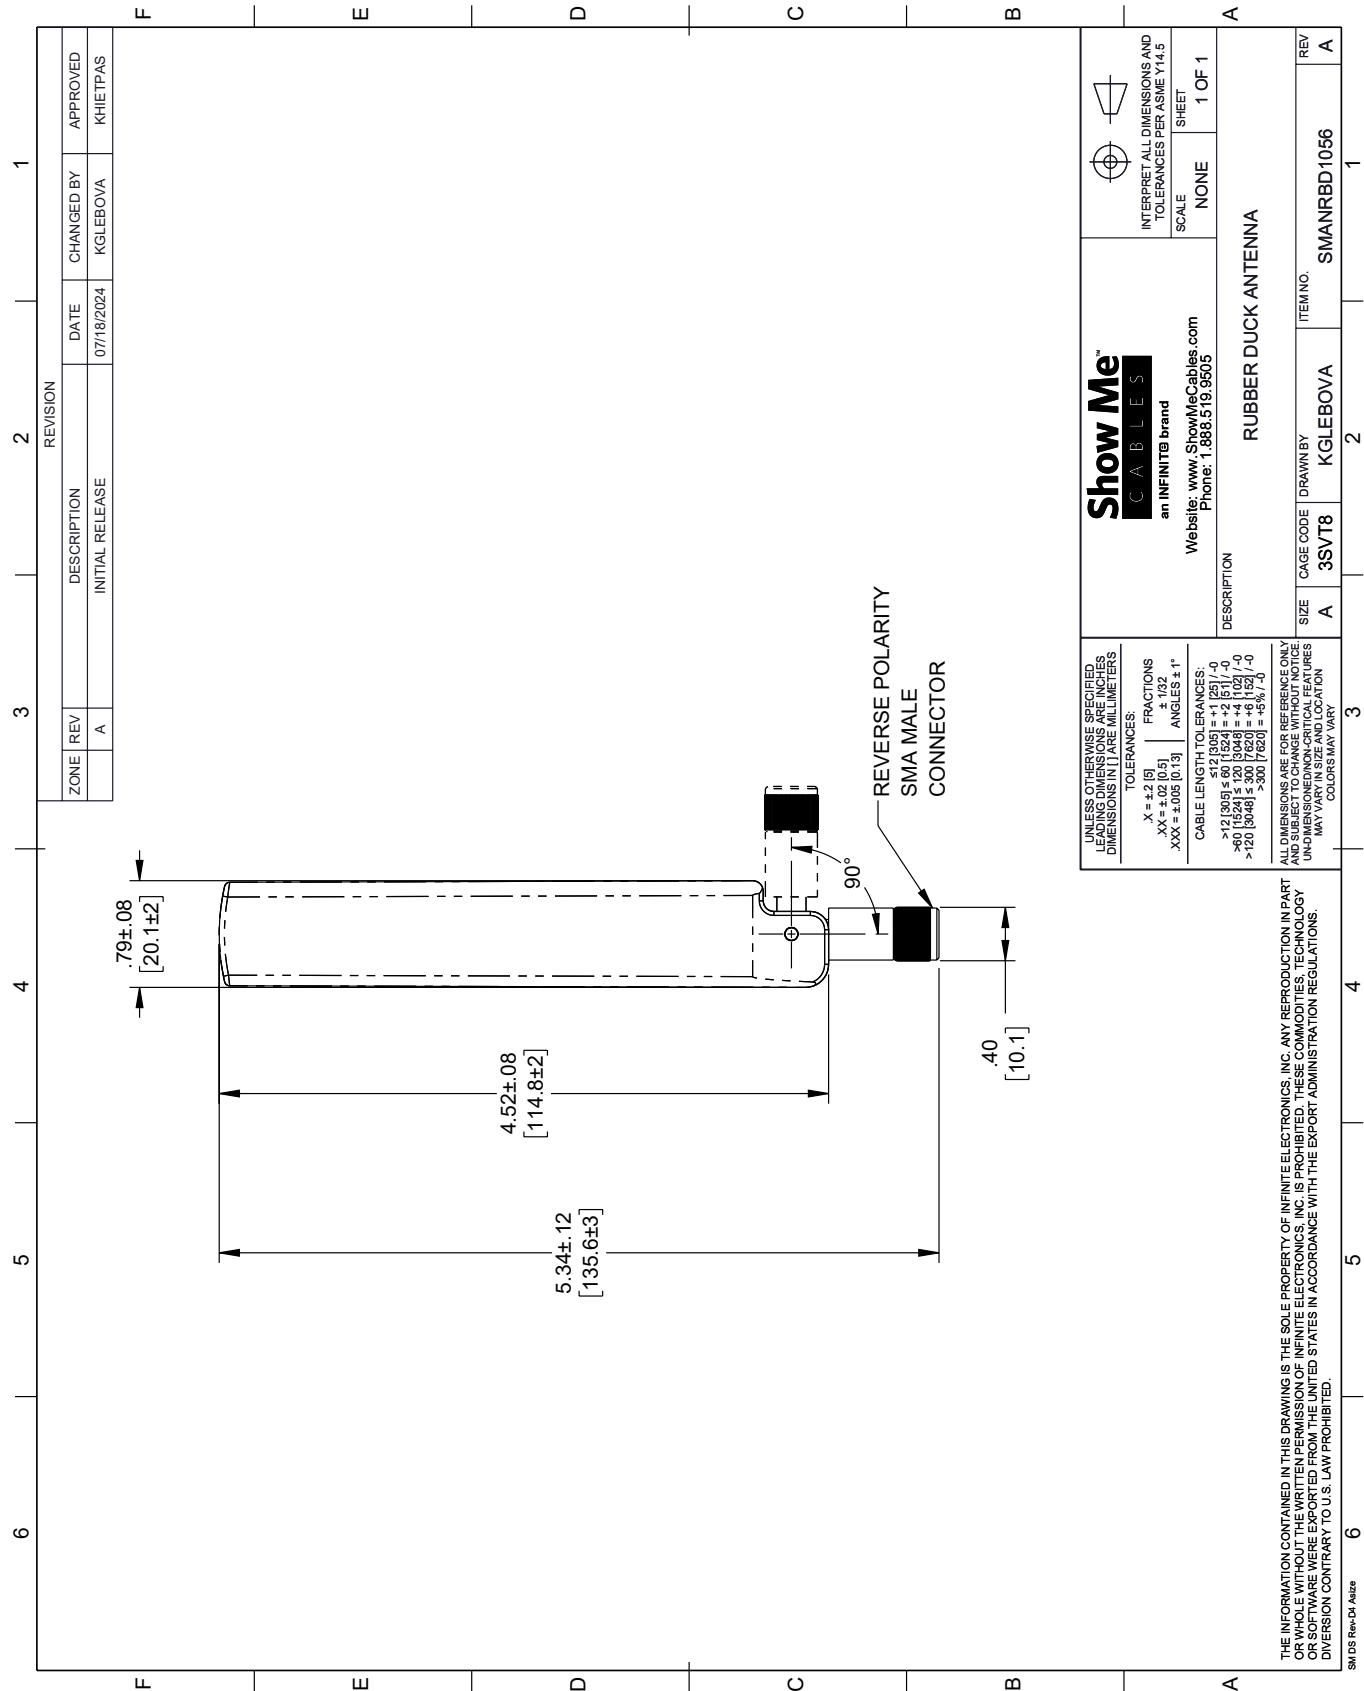

REVISION		DATE		APPROVED	
ZONE	REV	DESCRIPTION	INITIAL RELEASE	CHANGED BY	KHETTPAS
	A				

<div>Show Me[™] CABLES</div> <div>an INFINITO brand</div> <div>Website: www.ShowMeCables.com Phone: 1.888.519.9505</div>		<div></div> <div>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</div> <div>SCALE: NONE</div> <div>SHEET: 1 OF 1</div>	
UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		RUBBER DUCK ANTENNA	
TOLERANCES: X = ±.2 (5) .XX = ±.02 (0.5) .XXX = ±.005 (0.13) FRACTIONS: ± 1/32 ANGLES: ± 1° CABLE LENGTH TOLERANCES: >12 (305) ± .12 (3.05) = ± 1 (25) / -0 >60 (1524) ± .120 (3.048) = ± 4 (102) / -0 >120 (3048) ± .300 (7.62) = ± 8 (203) / -0 >300 (7620) ± .63 (16) = ± 5 (127) / -0		DESCRIPTION	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS OF NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		SIZE	REV
		A	A
		3SVT8	SMANRBD1056
		KGLEBOVA	
		ITEM NO.	