
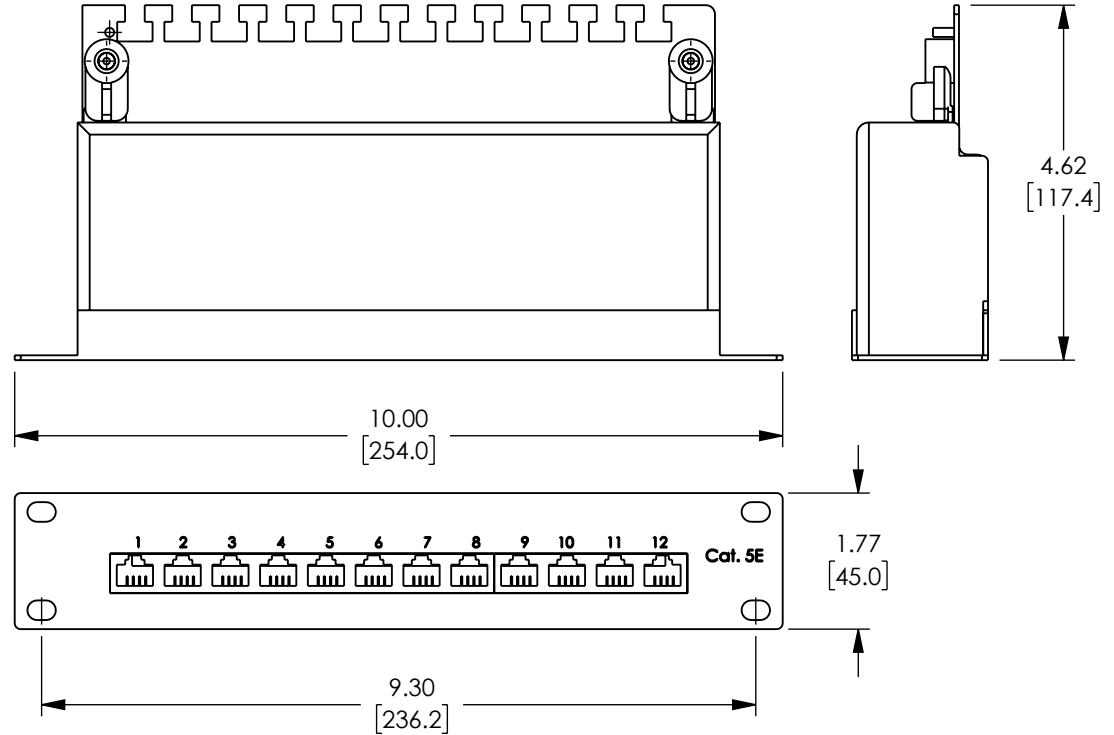


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	06/16/2023	THOUGHTON

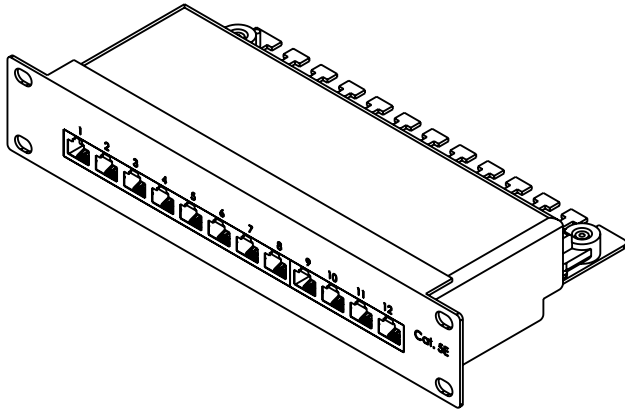

TYPE:

1. 10" CAT5E 1U 12PORT SHIELDED PATCH PANEL
2. COLOUR: BLACK
3. KRONE IDC

ELECTRICAL:

1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: $\leq 250M$ OHM @100 V DC
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60HZ, IMIN
4. CAT5E PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ} / +70^{\circ}$.
2. OPERATION: $-10^{\circ} / +60^{\circ}$.

MECHANICAL:

1. METAL MATERIAL: COLD ROLLED PLATE
2. PLASTIC MATERIAL: NEW PC
3. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
4. TERMINAL PINS: PHOSPHOR BRONZE, ZIN PLATING
5. RJ45 CONTACT LIFE: 750 TIMES MIN
6. IDC TERMINAL LIFE: 250 TIMES MIN

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0</p> <p>ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5] FRACTIONS $\pm 1/32$.XX = $\pm .02$ [.5] ANGLES $\pm 1^{\circ}$.XXX = $\pm .005$ [.13]</p> <p>THIRD-ANGLE PROJECTION</p>	APPROVALS	DATE	<p>Show Me CABLES an INFINIT® brand</p> <p>115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515</p>	
	DRAWN BY PSRINIVAS	06/16/2023		
	CHECKED BY DFRISIELLO	06/16/2023		
	APPROVED BY THOUGHTON	06/16/2023		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	<p>CATEGORY</p> <p>Patch Panels</p>		
	COLOR VARIATIONS MAY OCCUR	<p>PRODUCT DESCRIPTION</p> <p>CAT5E STP 10" Patch Panel, Black</p>		
	SIZE A	CAGE CODE 3SVT8	ITEM NO. SMC-10PP12C5E	REV. A
	SCALE: NONE	CAD FILE: SMC-10PP12C5E.SLDDRW	SHEET 1 OF 1	